

POLYURETHANE AND METAL BLADES

CUSTOM SPECIFICATIONS

Revised: 7/26/00

CUSTOM SPECIFICATIONS ARE UNIQUE TO EACH CUSTOMER'S APPLICATION AND THEREFORE ALL CUSTOM PRODUCT ORDERS CANNOT BE CANCELED OR RETURNED

NAME: _____ DATE: _____

COMPANY: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP CODE: _____

PHONE #: _____ FAX #: _____

SCREEN/STENCIL PRINTER: _____

METAL BLADE OR POLYURETHANE BLADE (CIRCLE ONE): POLY DUROMETER: _____ STYLE: _____ QTY: _____

DIMENSIONS:	<u>POLYURETHANE</u>	<u>METAL</u>	<u>POLYURETHANE/METAL</u>
WIDTH: "T" _____ (INCHES)		METAL STANDARD: <u>.012"</u> OR _____ (INCHES)	_____ (MM)
HEIGHT: "H" _____ (INCHES)		_____ (INCHES)	_____ (MM)
LENGTH: "L" _____ (INCHES)		_____ (INCHES)	_____ (MM)

SPECIFY ANGLES ON SINGLE EDGE BLADES "Ø": _____

NUMBER OF HOLES: _____

HOLE DIAMETER: "D": _____ (INCHES) _____ (MM)

HOLE LOCATIONS: "Y": _____ (INCHES) _____ (MM)

"C¹": _____ (INCHES) _____ (MM)

"C²": _____ (INCHES) _____ (MM)

"C³": _____ (INCHES) _____ (MM)

"REF": _____ (INCHES) _____ (MM)

POLYURETHANE BLADES

U = PRECISION MACHINED - 50*/60/70/80/90 DUROMETER
(DIMENSIONAL TOLERANCE +/- .010)


P = PRECISION GROUND - 100/110/120/180 DUROMETER
(DIMENSIONAL TOLERANCE +/- .005)

*50 DUROMETER IS AVAILABLE IN
DIAMOND STYLE ONLY


ALL JNJ METAL BLADES FEATURE OUR PROPRIETARY ELECTROLIZED® PLATING FINISH. THIS PATENTED PROCESS PROVIDES A HARDNESS RATING OF ROCKWELL C70 AND IS VERY SLIPPERY AND DUCTILE SO THAT IT WON'T CHIP, FLAKE OR CRACK LIKE OTHER METAL BLADE PLATINGS. OUR NON-POROUS DUCTILE COATING CLEANS UP EASY AND AIDS IN PASTE RELEASE.

⇒ A DRAWING IS REQUIRED ON ANY CUSTOM BLADE THAT CANNOT BE COMPLETELY SPECIFIED ON THIS FORM. ⇐



DIAMOND "D"
SQUARE EDGE



POLYBLADE "F"
RECTANGULAR

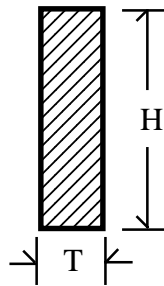

SINGLE EDGE "S"
CENTER BEVEL

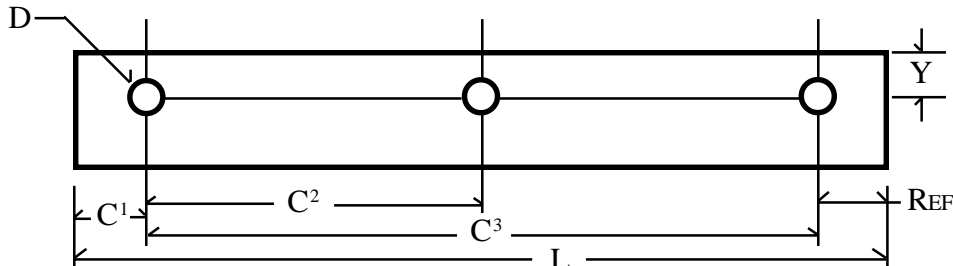

Signature Of Preparer _____ DRAWING ATTACHED: YES: _____ NO: _____

FAX BACK INFORMATION TO: JNJ INDUSTRIES, INC. - FAX # 508-553-9973 OR CALL 800-554-9994/508-553-0529