

POLYURETHANE AND METAL BLADES

CUSTOM SPECIFICATIONS

revised: 6/16

CUSTOM SPECIFICATIONS ARE UNIQUE TO EACH CUSTOMER'S APPLICATION. THEREFORE, ALL CUSTOM PRODUCT ORDERS CANNOT BE CANCELED OR RETURNED.

NAME: _____ DATE: _____

COMPANY: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP CODE: _____

PHONE #: _____ EMAIL: _____

SCREEN/STENCIL PRINTER: _____

METAL BLADE OR POLYURETHANE BLADE (CIRCLE ONE): POLY DUROMETER: _____ STYLE: _____ QTY: _____

DIMENSIONS:	POLYURETHANE	METAL	POLYURETHANE/METAL
WIDTH: "T" _____ (INCHES)	METAL STANDARD: .012" OR _____ (INCHES)	_____ (MM)	_____ (MM)
HEIGHT: "H" _____ (INCHES)	_____ (INCHES)	_____ (MM)	_____ (MM)
LENGTH: "L" _____ (INCHES)	_____ (INCHES)	_____ (MM)	_____ (MM)

SPECIFY ANGLES ON SINGLE EDGE BLADES "Ø": _____

NUMBER OF HOLES: _____		
HOLE DIAMETER: "D": _____ (INCHES)	_____ (MM)	
HOLE LOCATIONS: "Y": _____ (INCHES)	_____ (MM)	
"C1": _____ (INCHES)	_____ (MM)	
"C2": _____ (INCHES)	_____ (MM)	
"C3": _____ (INCHES)	_____ (MM)	
"REF": _____ (INCHES)	_____ (MM)	


POLYURETHANE BLADES
 U = PRECISION MACHINED
 60/70/80/90 DUROMETER
 (DIMENSIONAL TOLERANCE +/- .010)

CUSTOM DUROMETERS
 CONTACT SALES FOR INFORMATION
 U = PRECISION MACHINED
 50 DUROMETER
 P = PRECISION GROUND
 100/110/120 DUROMETER


ALL JNJ METAL BLADES FEATURE OUR PROPRIETARY ELECTROLIZED® PLATING FINISH. THIS PATENTED PROCESS PROVIDES A HARDNESS RATING OF ROCKWELL C70 AND IS VERY SLIPPERY AND DUCTILE SO THAT IT WON'T CHIP, FLAKE OR CRACK LIKE OTHER METAL BLADE PLATINGS. OUR NON-POROUS DUCTILE COATING CLEANS UP EASY AND AIDS IN PASTE RELEASE.

⇒ A DRAWING IS REQUIRED ON ANY CUSTOM BLADE THAT CANNOT BE COMPLETELY SPECIFIED ON THIS FORM. ⇐



DIAMOND "D"
SQUARE EDGE



POLYBLADE "F"
RECTANGULAR



SINGLE EDGE "S"
CENTER BEVEL

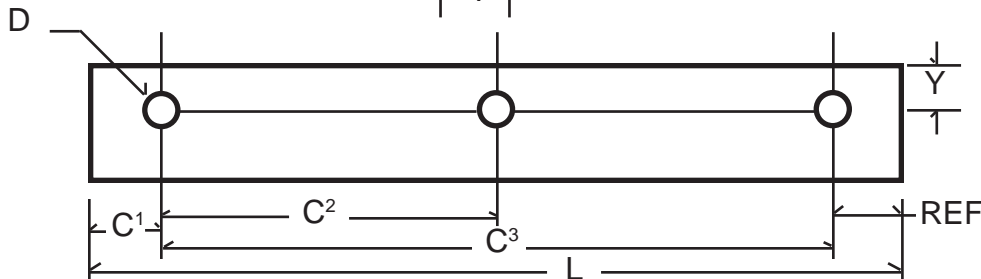

Signature Of Preparer _____ DRAWING ATTACHED: YES: _____ NO: _____

EMAIL OR FAX BACK INFORMATION TO: JNJ INDUSTRIES - FAX: 508.553.9973 OR EMAIL: sales@jnj-industries.com